


# GPN 602

Free test samples:

+49 4442 982-9100

poeppelemann.com/en/gpn602

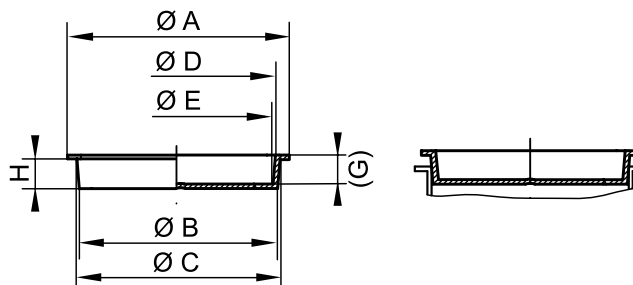

item	Inner application				External application			Order no.
	A	B	C	H	D	E	(G)	
GPN 602 D 1055*	110	103	105	16	104	102	17	602 1055 0000
GPN 602 D 1070	117	104.5	107	16	106	103.5	17.2	602 1070 0000
GPN 602 D 1090	117	106	109	17	107.5	106	18.4	602 1090 0000
GPN 602 D 1230	130	119.5	123	23	122	118	24.4	602 1230 0000
GPN 602 D 1290	136	126	129	25	128	127	26.5	602 1290 0000
GPN 602 D 1306	136.5	128	130.6	23	129	127	24.2	602 1306 0000
GPN 602 D 1380	144	135	138	23	137	134	24.4	602 1380 0000

Size in mm

For information regarding materials, colours, drawings and the use of our items, please refer to pages 124/125.

\*This size is supplied with bore hole.

You might also be interested in the following products: GPN 610, GPN 615, GPN 620

Standard colour: Red

Material: PP



### Saves time.

Easy handling due to being a thinner walled version of the GPN 600.



### Lighter.

Less material used during production.



### More versatile.

Can be used universally as plug or cap. The tapered design is ideal for accommodating tolerances.



### Cleaner.

Upon request, we can manufacture in the specially designed cleanroom in accordance with VDA Volume 19 and ISO 16232. For further information, please refer to page 129.



### Better.

To close off bore holes and internal openings, or to protect studs and external threads.

